



**FAILURE TO COMPLY WITH THESE INSTRUCTIONS WILL
RESULT IN THE LOSS OF THE WARRANTY BY THE USER/BUYER.**

WARRANTY CONDITIONS

RESPONSIBILITY:

By means of this document, the manufacturer guarantees that the products covered by the warranty and delivered to the buyer are free from defects.

The warranty covers only defects resulting from manufacturing faults in the product.

The manufacturer: **COLORBAN DESIGN 2015, S.L.**, grants the buyer a 3-year product quality warranty from the date of purchase. Claims for manufacturing defects may be processed by means of repair or replacement of the defective part. If this is not possible, the product will be replaced or returned at a reduced price according to its use, in which case it becomes the property of the manufacturer.

Claims under warranty will be considered only if the products have not been subjected to any manipulation.

COLORBAN DESIGN 2015, S.L. will confirm the validity of the warranty after examining the product upon its return.

Before installation, the condition of the product must be checked. If any defect is detected, it must not be installed.


The assembly, use and cleaning instructions must be strictly followed.

EXCLUSION OF WARRANTY:

- Physical damage caused after the sale of the product.
- Defects caused by improper installation of the product.
- Damages caused by improper handling or failure to follow the instructions for use or maintenance.
- Physical damage to products already installed.
- Interventions or modifications performed by personnel not authorized by **COLORBAN DESIGN 2015, S.L.**
- Deterioration caused by humidity in the place of installation.

PRESENTATION OF THE CLAIM:

- Proof of purchase (receipt, invoice) and any graphic evidence requested by the After-Sales Department are required for claims of defective products under warranty.
- The buyer has a period of 48 hours to report any manufacturing defect observed, either through the SUPPORT section of the website or by email at: postventa@grupocolorban.com
- For the claim to be processed, the entire product must be returned properly packaged, in accordance with the agreed delivery conditions, together with all required documents and within the warranty period (receipt, invoice, warranty certificate, etc.).
- Any repair or replacement covered by the warranty will begin within 30 business days from the date the claim is approved.
- After the end of the warranty period, repair costs will be borne by the buyer.

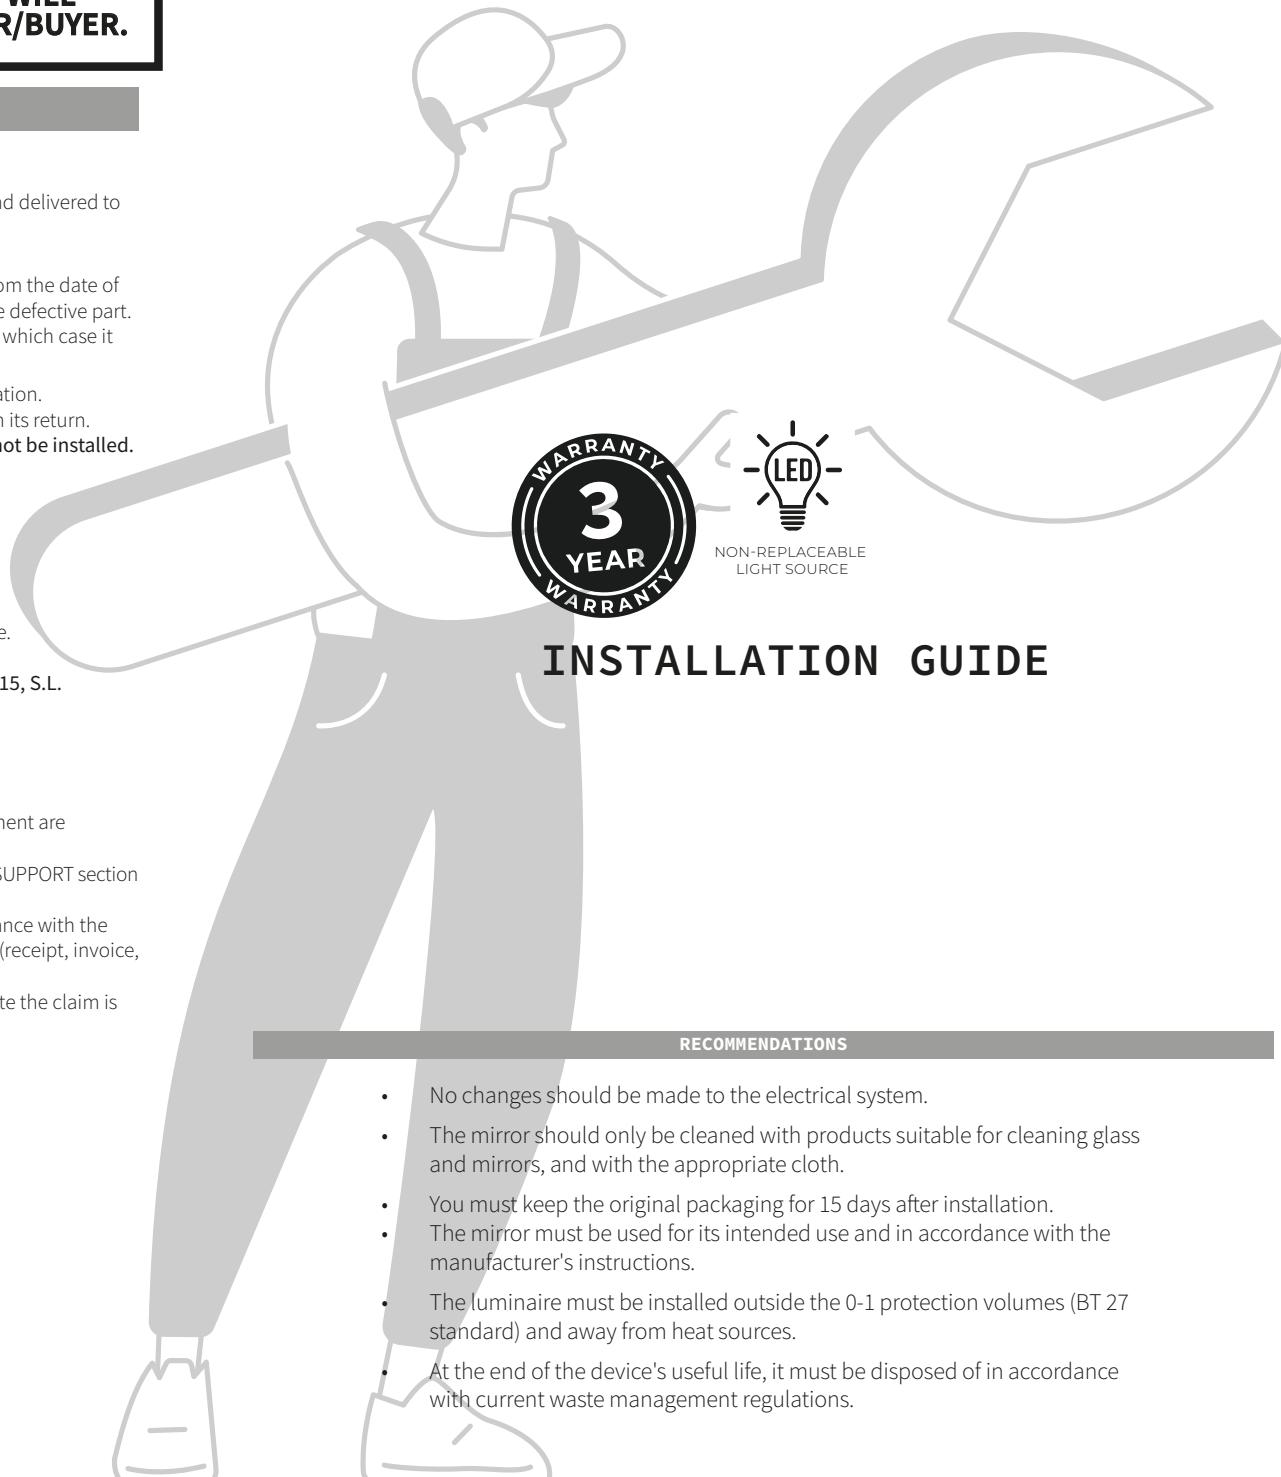

INSTALLATION GUIDE

RECOMMENDATIONS

- No changes should be made to the electrical system.
- The mirror should only be cleaned with products suitable for cleaning glass and mirrors, and with the appropriate cloth.
- You must keep the original packaging for 15 days after installation.
- The mirror must be used for its intended use and in accordance with the manufacturer's instructions.
- The luminaire must be installed outside the 0-1 protection volumes (BT 27 standard) and away from heat sources.
- At the end of the device's useful life, it must be disposed of in accordance with current waste management regulations.



INCLUDED MATERIALS

The mounting surface on which the mirror will be installed must be able to support four times its weight.



ASSEMBLY INSTRUCTIONS


1 BEFORE BEGINNING ASSEMBLY: CUT OFF THE POWER TO THE POWER GRID.



DO NOT REMOVE THE CORNER PROTECTORS UNTIL THE INSTALLATION PROCESS IS COMPLETED

2 CAREFULLY REMOVE THE PRODUCT AND ATTACH THE 2 CORNER PROTECTORS.

3 IN THE PREFERRED LOCATION, MEASURE THE DISTANCE FOR THE HOLES USING THE METALLIC HANGER AS A REFERENCE.



3.1 Use the hanger to mark the holes.


3.2 Check that no pipes or electrical cables pass through.



3.3 Insert the plugs into the holes.




3.4 Place the hooks, leaving them protruding 1cm from the wall.

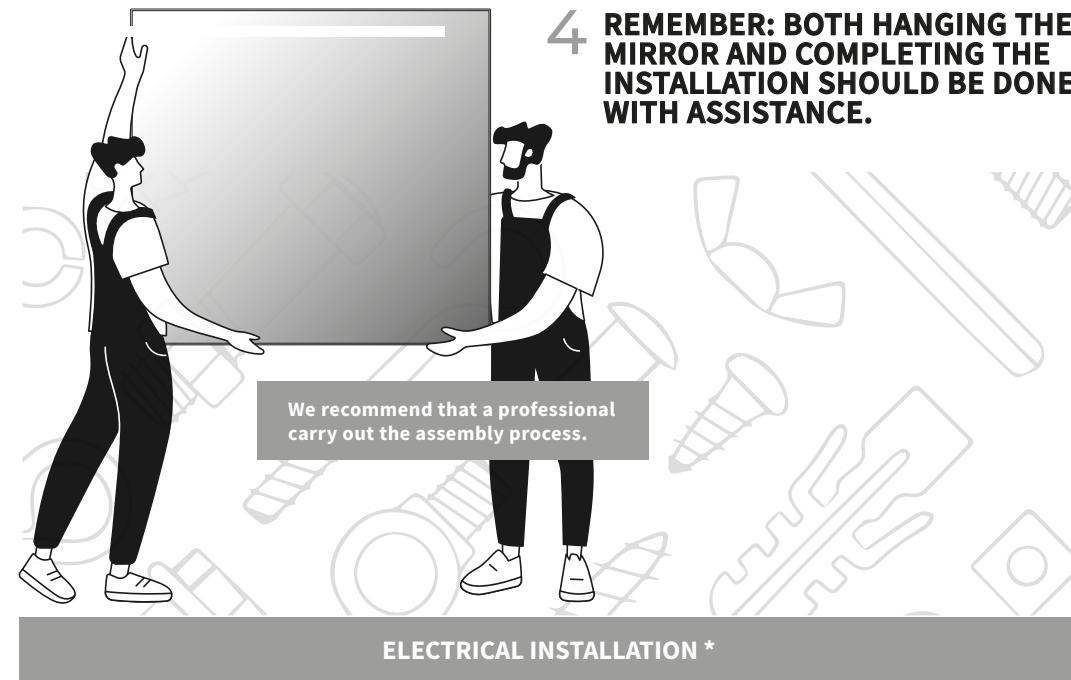

*To avoid any risk, in the event that the luminaire cable is damaged, it may only be replaced by the manufacturer or its technical service.



ONLY AN ELECTRICIAN SHOULD CARRY OUT THE ELECTRICAL INSTALLATION.

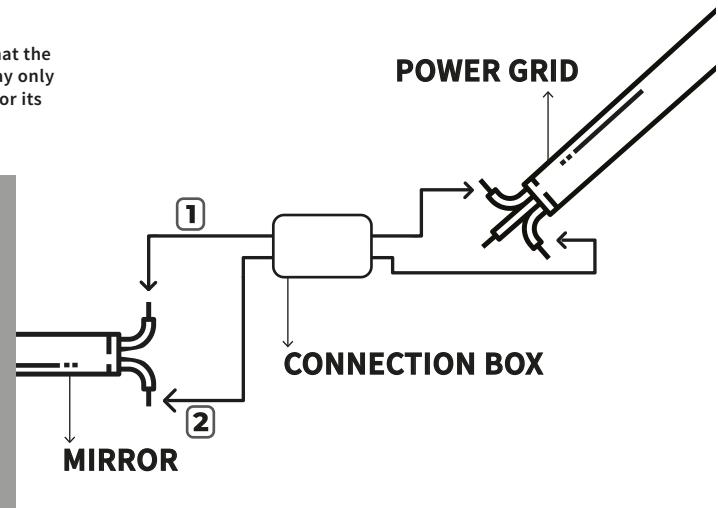

WE RECOMMEND USING THE CONNECTION BOX TO MAKE THE FOLLOWING CONNECTIONS:

- 1 Connect the brown (phase) wire of the driver to the brown (phase) wire from the power grid.
- 2 Connect the blue (neutral) wire of the driver to the blue (neutral) wire from the power grid.